

Designated client product

This product will be discontinued its production in the near term.
And it is provided for customers currently in use only, with a time limit.
It can not be available for your new project. Please select other new or existing products.

For more information, please contact our sales office in your region.

New Japan Radio Co.,Ltd.

<http://www.njr.com/>

LOW-NOISE DUAL OPERATIONAL AMPLIFIER


■ GENERAL DESCRIPTION

The NJM2041 is a bipolar operational amplifier which is designed as low noise version of the NJM4558 with high output current and fast slew rate ($3\text{V}/\mu\text{s}$) and wide unity gain bandwidth (7MHz) constructed using New JRC Planar epitaxial process.

■ FEATURES

- Operating Voltage ($\pm 4\text{V} \sim \pm 22\text{V}$)
- High Output Current (25mA)
- Slew Rate ($3\text{V}/\mu\text{s}$ typ.)
- Unity Gain Bandwidth (7MHz typ.)
- Package Outline DIP8, DMP8, SIP8
- Bipolar Technology


■ PACKAGE OUTLINE



NJM2041D




NJM2041M




NJM2041L

■ PIN CONFIGURATION



NJM2041D
NJM2041M




NJM2041L

PIN FUNCTION

1. A OUTPUT
2. A -INPUT
3. A +INPUT
4. V^-
5. B +INPUT
6. B -INPUT
7. B OUTPUT
8. V^+

■ EQUIVALENT CIRCUIT (1/2 Shown)

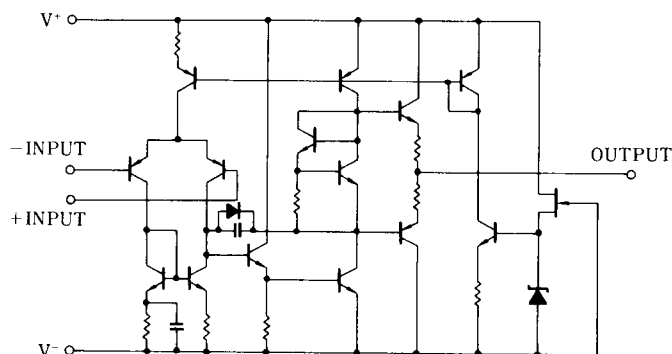

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+ / V^-	± 22	V
Differential Input Voltage	V_{ID}	± 30	V
Input Voltage	V_{IC}	± 15 (note)	V
Power Dissipation	P_D	(DIP8) 500 (DMP8) 300 (SIP8) 800	mW
Operating Temperature Range	T_{opr}	-20~+75	°C
Storage Temperature Range	T_{stg}	-40~+125	°C

(note) For supply voltage less than $\pm 15V$, the absolute maximum input voltage is equal to the supply voltage.

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C, $V^+ / V^- = \pm 15V$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	$R_S \leq 10k\Omega$	-	0.3	3	mV
Input Offset Current	I_{IO}		-	10	200	nA
Input Bias Current	I_B		-	200	500	nA
Input Resistance	R_{IN}		50	200	-	k Ω
Large signal Voltage Gain	A_V	$R_L \geq 2k\Omega, V_O = \pm 10V$	86	110	-	dB
Maximum Output Voltage Swing 1	V_{OM1}	$R_L \geq 10k\Omega$	± 12	± 14	-	V
Maximum Output Voltage Swing 2	V_{OM2}	$I_O = 25mA$	± 10	± 11.5	-	V
Input Common Mode Voltage Range	V_{ICM}		± 12	± 14	-	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	70	100	-	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10k\Omega$	76	100	-	dB
Operating Current	I_{CC}		-	6	8	mA
Slew Rate	SR		-	3	-	V/ μs
Gain Bandwidth Product	GB		-	7	-	MHz
Equivalent Input Noise Voltage	V_{NI}	FLAT+JISA $R_S = 300\Omega$	-	0.48	0.61	μV_{rms}


(note) New JRC's general selected products D rank are also prepared for the noise standard ($R_S = 2.2k\Omega$, RIAA, $V_{NI} = 1.4\mu V$ Max.)

■ TYPICAL CHARACTERISTICS


Large Signal Voltage Gain vs. Frequency
($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$, $T_a = 25^\circ C$)

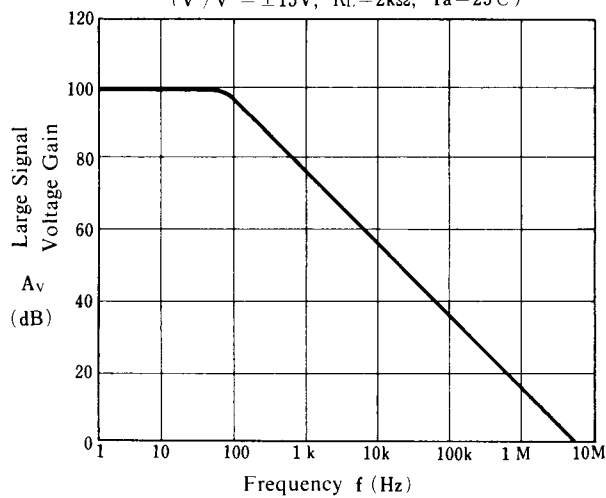


Equivalent Input Noise Voltage
($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)

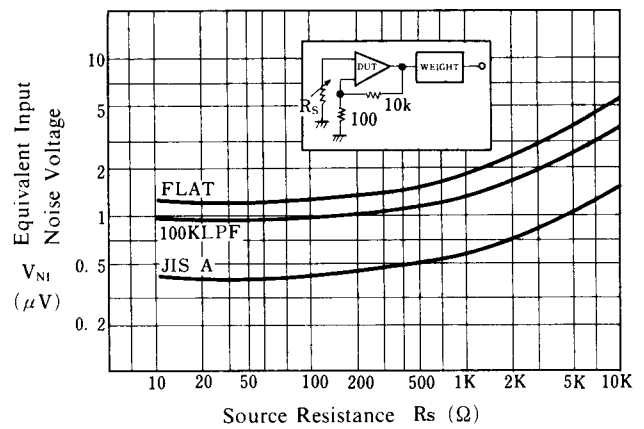


Maximum Output Voltage Swing vs. Load Resistance
($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)

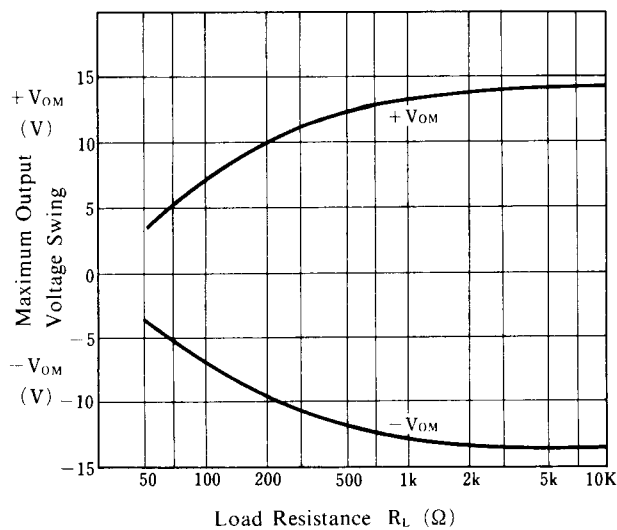


Maximum Output Voltage Swing vs. Output Current
($T_a = 25^\circ C$)

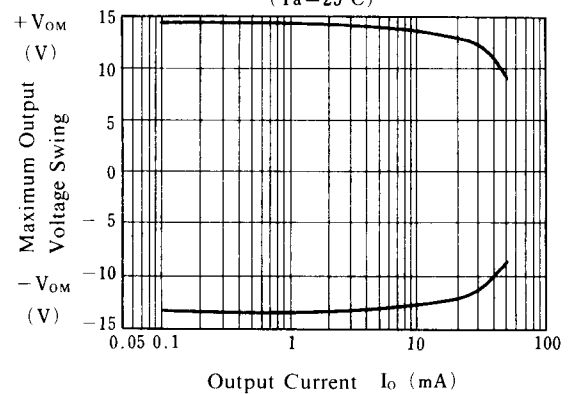

Operating Current vs. Temperature
($V^+/V^- = \pm 15V$)

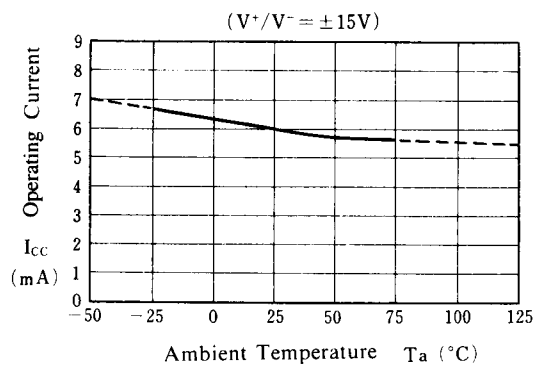


Maximum Output Voltage Swing vs. Temperature
($V^+/V^- = \pm 15V$, $R_L = 10k\Omega$)

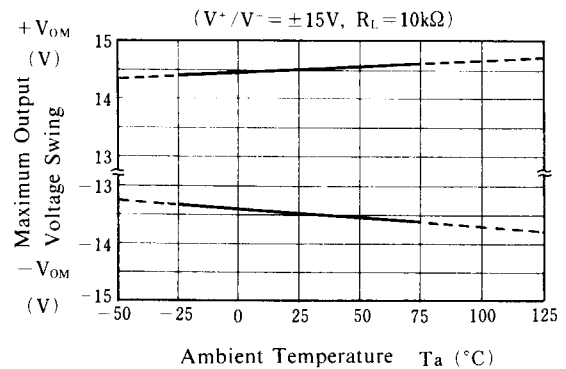

■ TYPICAL CHARACTERISTICS


Input Offset Voltage vs. Temperature

($V^+/V^- = \pm 15V$)

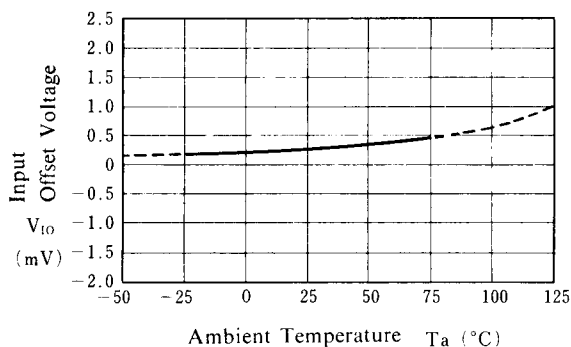


Input Bias Current vs. Temperature

($V^+/V^- = \pm 15V$)

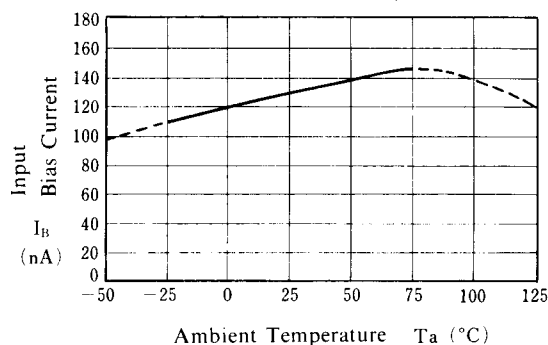


Maximum Output Voltage Swing vs. Operating Voltage

($R_L = 400\Omega$, $T_a = 25^\circ C$)

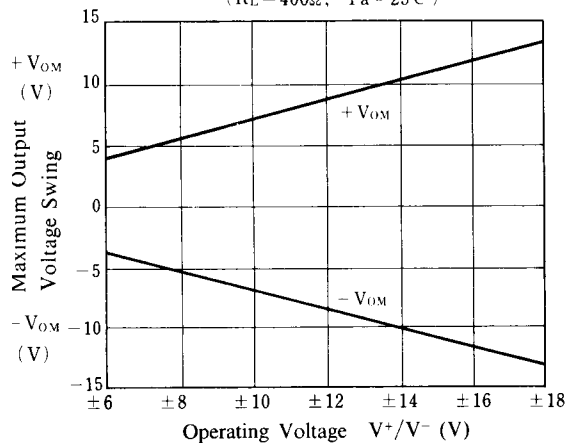


Maximum Output Voltage Swing vs. Operating Voltage

($R_L = 2k\Omega$)

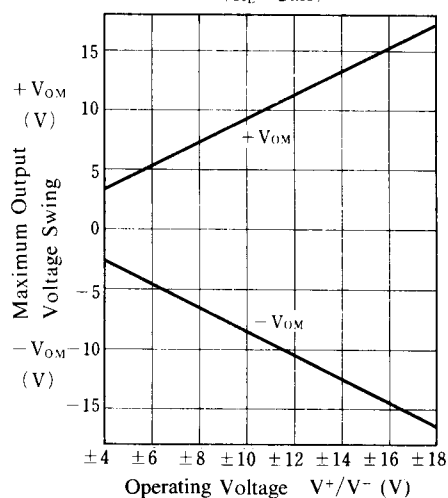


Operating Current vs. Operating Voltage

($T_a = 25^\circ C$)

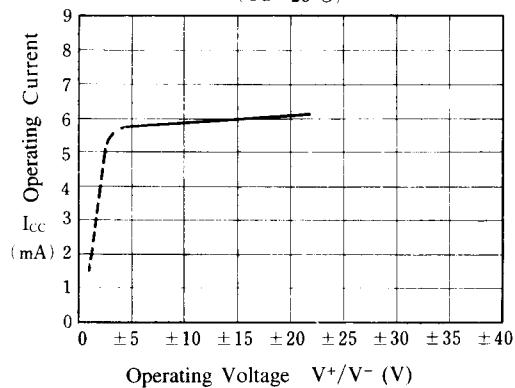

Maximum Output Voltage Swing vs. Frequency

($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$, $T_a = 25^\circ C$)

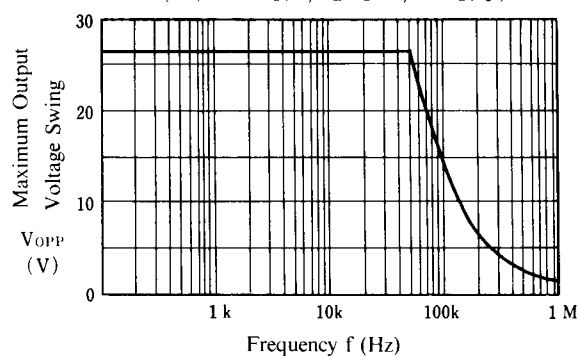

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nisshinbo Micro Devices:

[NJM2041M-TE1](#) [NJM2041M-TE2](#) [NJM2041M-TE3](#) [NJM2041LD](#) [NJM2041DD](#) [NJM2041MD](#) [NJM2041MD-TE3](#)
[NJM2041MD-TE2](#) [NJM2041MD-TE1](#) [NJM2041L](#) [NJM2041D](#) [NJM2041M](#) [NJM2041MD-T1](#) [NJM2041M-T2](#)
[NJM2041M-T1](#)

NJR:

[NJM#2041DD](#) [NJM#2041MD-TE2](#) [NJM#2041MD](#) [NJM#2041L](#) [NJM#2041D](#) [NJM#2041M](#)